



Make up inspiration
For all spaces

30x60cm
High Depth Elevation



Rey Plus, a company founded in 2003, has been manufacturing and selling integral porcelain tiles for all kinds of flooring and wall tiling solutions.

The manufacturing plant and main offices in Morbi, Gujarat IN, and the Worldwide logistics warehouses, make it possible to supply and deliver all the items in customers' orders. Through its national and international distribution network, Rey Cera exports tiles to more than 85 countries in all five continents.

As a result of our commitment to quality, all of our products comply with the guidelines of the ISO 9001:2000 standard, which guarantees that our research, development and commercializations are carried out with the maximum guarantees.



Style Of Fabulous finesse

The shades that compose the Elevation series, comes to their sobriety and naturalness, perfectly in tune with the contemporary style of home furnishing. The minute details that characterized the Elevation collection are seen best in the three-dimensional structures decor; in the Wall 3D.

for example, built from small bush hammered, honed and sand-blasted pieces, or in the Rub decor, which with its worked surface, tells the story of the material quality of sedimentary stone.



Decorative Mood

A decorated wall can transform an interior into a lush garden that calms the body and mind. Leaves, flowers and tropical atmospheres serve as inspiration for a range of decorative surfaces that fit in perfectly with the latest trends in fashion and design. The exotic atmospheres of the Wide&Style Mini patterns evoke the allure of faraway places allowing one to reconnect with nature without leaving the home.





Aiden Rust Kristal (R-3)

Size
30x60cm

Finish
Elevation Matt






Allison Rust (R-3)

Size
30x60cm

Finish
Elevation Matt



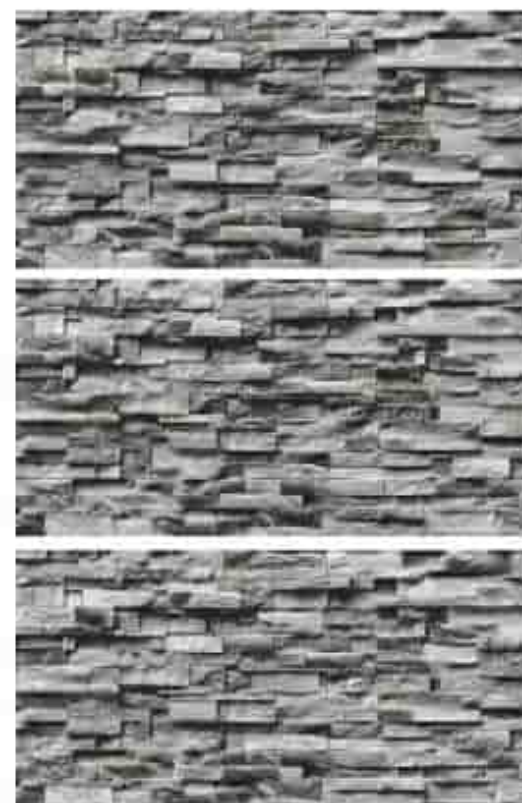

Alden Black Kristal (R-3)

Size
30x60cm

Finish
Elevation Matt



Cruze Beige Kristal (R-3)

Size
30x60cm

Finish
Elevation Matt



Cruze Tan Kristal (R-3)

Size
30x60cm


Finish
Elevation Matt



Elvis Gris Kristal (R-3)

Size
30x60cm

Finish
Elevation Matt

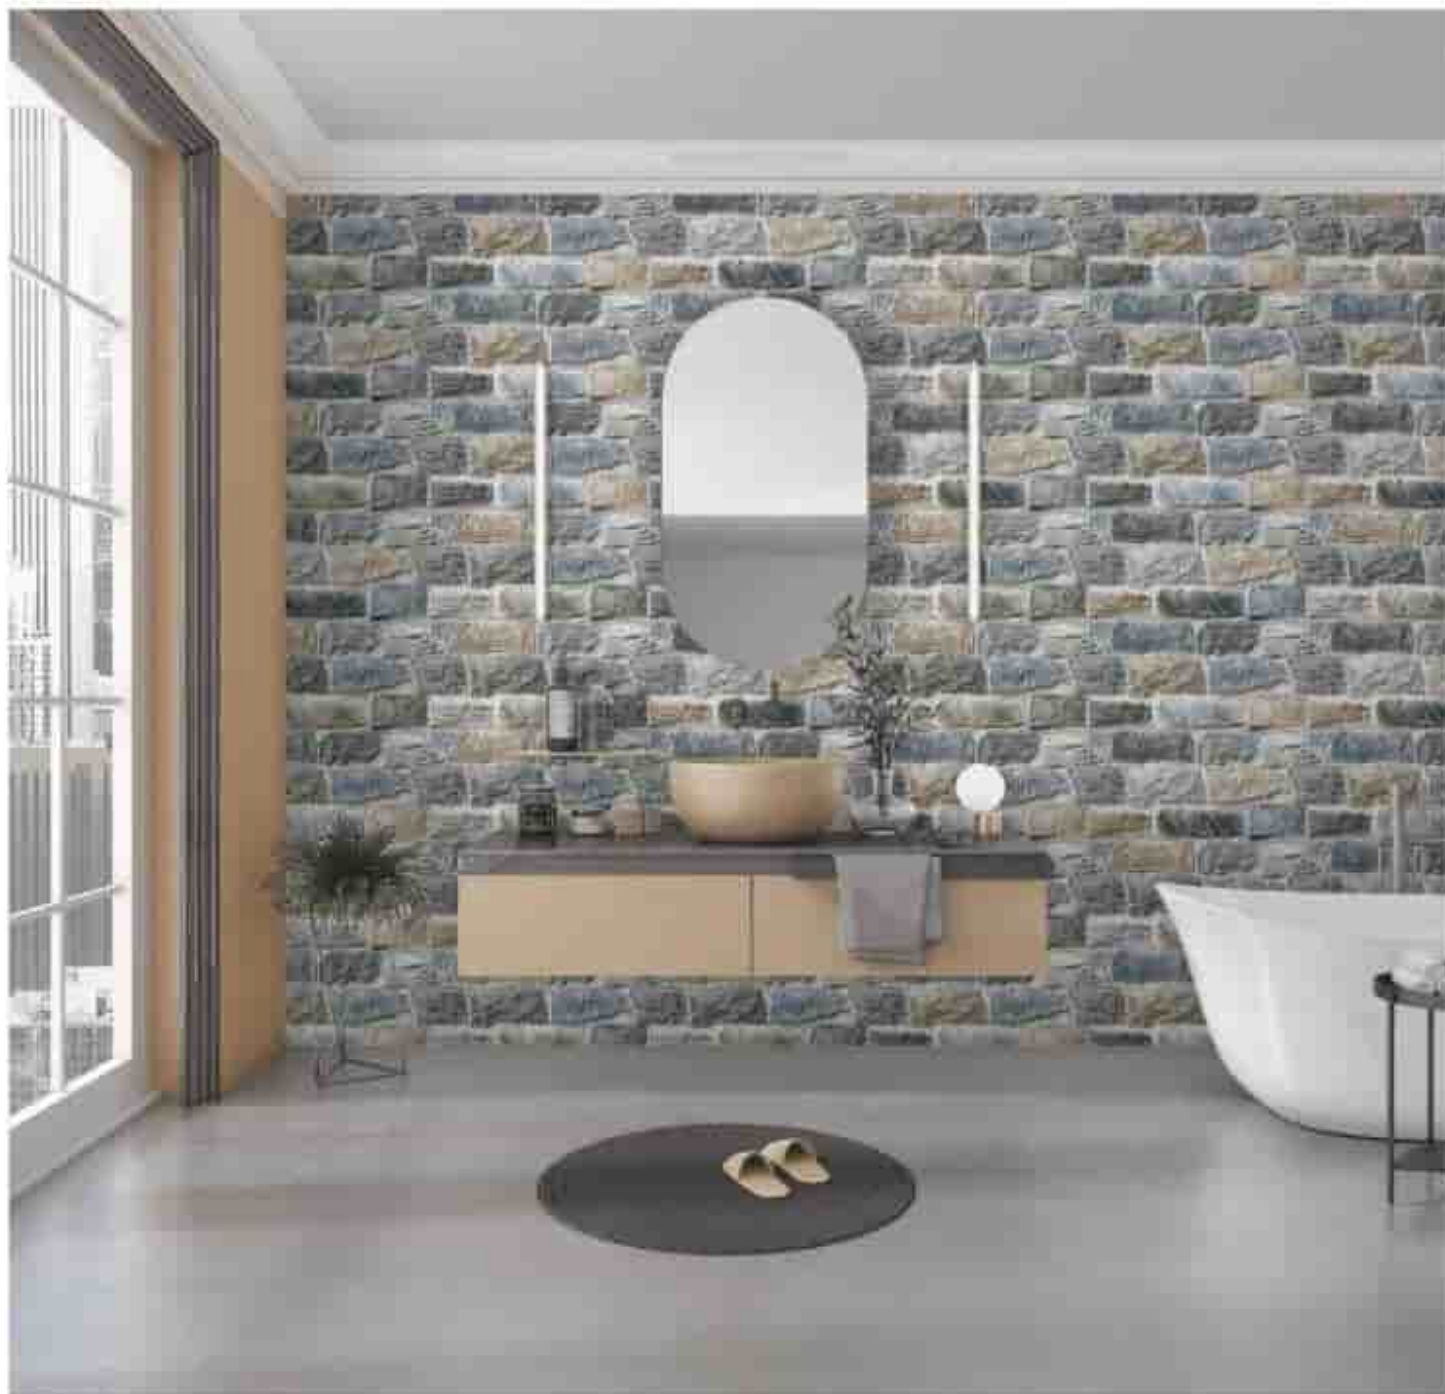




Elvis Natural Kristal (R-3)

Size
30x60cm

Finish
Elevation Matt

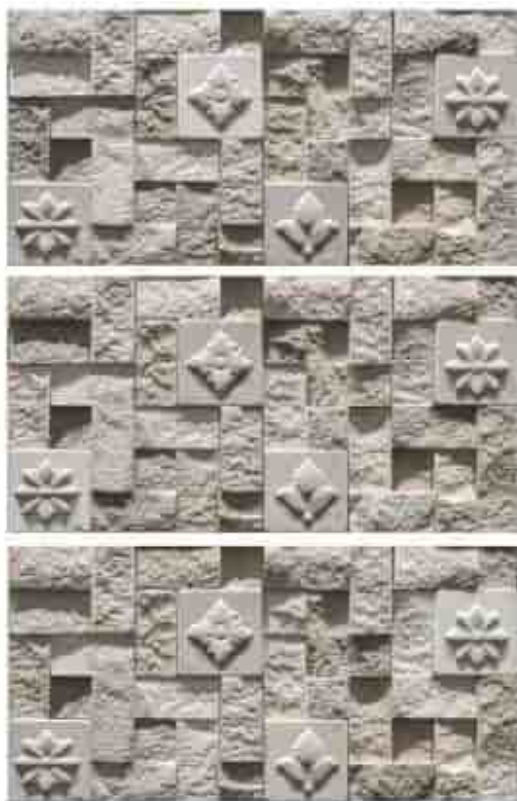

Mavco Grey Kristal (R-4)

Size
30x60cm


Finish
Elevation Matt



TIMELESS BEAUTY
AND
EXPERTISE OF ART



SERIES MAXIMO

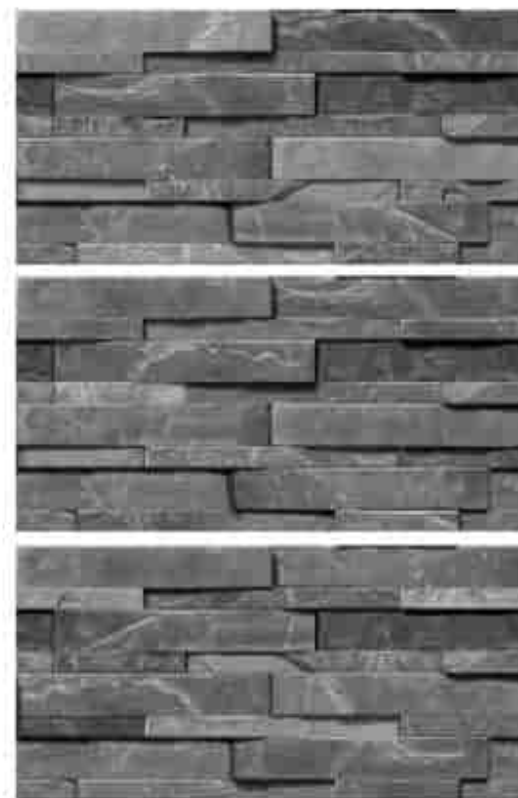

Maximo Slate (R-4)

Size
30x60cm

Finish
Elevation Matt



DEPTH UP TO
05mm



THICKNESS
9.3 mm



WATER
RESISTANCE



Maximo Gris (R-4)

Size
30x60cm

Finish
Elevation Matt



Skyler Gris Kristal (R-3)

Size
30x60cm

Finish
Elevation Matt



Theos Natural Kristal (R-3)

Size
30x60cm

Finish
Elevation Matt



Troy Grey Kristal (R-3)

Size
30x60cm

Finish
Elevation Matt



Theos Brown Kristal (R-3)

Size
30x60cm

Finish
Elevation Matt



Troy Liva Kristal (R-3)

Size
30x60cm

Finish:
Elevation Matt

TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATIONS – GLAZED VITRIFIED TILES (GROUP BIa)

CHARACTERISTIC	TEST METHOD	INTERNATIONAL STD (ISO 10545-1 TO ISO 10545-8)	PORCELAIN VALUE
DIMENSION & SURFACE QUALITY			
Deviation In Length	ISO-10545-2	±0.6%	±0.3%
Deviation In Thickness	ISO-10545-2	±3%	±4%
Straightness Of Sides	ISO-10545-2	±0.5%	±0.2%
Rectangularity	ISO-10545-2	±0.6%	±0.2%
Surface Flatness	ISO-10545-2	±0.5%	±0.2%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-3	≤0.5%	≤0.2%
Mohs Hardness	EN-101	Min.3	Min.3
Flexural Strength	ISO-10545-4	≥35 N/mm ²	≥40 N/mm ²
Skid Resistance (Friction Coefficient)	ISO-10545-17	-	≥0.2 (Dry)
Breaking Strength	ISO-10545-11	≥103 N	≥800 N
Frost Resistance	ISO-10545-12	Frost Proof	Frost Proof
Thermal Shock Resistance	ISO-10545-9	No Damage	No Damage
Moisture Expansion	ISO-10545-10	NIL	NIL
Resistance to Surface Abrasion	ISO-10545-7	-	PEI III & IV
CHEMICAL PROPERTIES			
Chemical Resistance	ISO-10545-13	No Damage	No Damage
Color Resistance	ISO-10545-16	No Damage	No Damage
Stain Resistance	ISO-10545-14	Resistant	Resistant

TECHNICAL SPECIFICATIONS – CERAMIC TILES

CHARACTERISTIC	TEST METHOD	INTERNATIONAL STD (ISO 10545-1 TO ISO 10545-8)	CERAMIC VALUE
DIMENSION & SURFACE QUALITY			
Deviation In Length	ISO-10545-02	±0.20%	±0.10%
Deviation In Thickness	ISO-10545-02	±7.00%	±0.10%
Straightness Of Sides	ISO-10545-03	±0.15%	±0.10%
Rectangularity	ISO-10545-02	±0.20%	±0.10%
Surface Flatness	ISO-10545-02	±0.20%	±0.20%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-03	≤10%	≤2%
Mohs Hardness	EN-101	Min. Class 3	Compliant
Flexural Strength	ISO-10545-04	≥ 15 N/mm ²	Compliant
Skid Resistance (Friction Coefficient)	ISO-10545-08	≥0.2 x 10 ⁻³ Sec ⁻¹	Compliant
Breaking Strength	ISO-10610-06	600 Min.	Compliant
Frost Resistance	ISO-13630-03	0.04 mm/M Max.	Compliant
Thermal Shock Resistance	ISO-10545-09	Min. 10 Cycles	Compliant
Moisture Expansion	ISO-13630-03	0.04 mm/M Max.	Passed 10 Cycles
Resistance to Surface Abrasion	ISO-13630-14	0.25 Min.	4 Cycle Passed
CHEMICAL PROPERTIES			
Chemical Resistance	ISO-10545-13	As per Mfg	No Visible effect
Color Resistance	ISO-10545-13	Class AA Min.	Compliant
Stain Resistance	ISO-10545-14	Class 1 Min.	Compliant