



30X60cm

High Depth
Elevation Series

Vitrified Body
Wall Tiles

ELEVATION

30x60cm



6301

ELEVATION

30x60cm



6302

ELEVATION
30x60cm



6303

ELEVATION

30x60cm



6304

ELEVATION

30x60cm



6305

ELEVATION


30x60cm



6306

ELEVATION

30x60cm

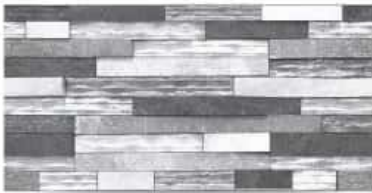

6307

ELEVATION

30x60cm



6308

ELEVATION

30x60cm



6309

ELEVATION

30x60cm



6310

ELEVATION

30x60cm



6311

ELEVATION

30x60cm



6312

ELEVATION

30x60cm



6313

ELEVATION


30x60cm



6314

ELEVATION

30x60cm

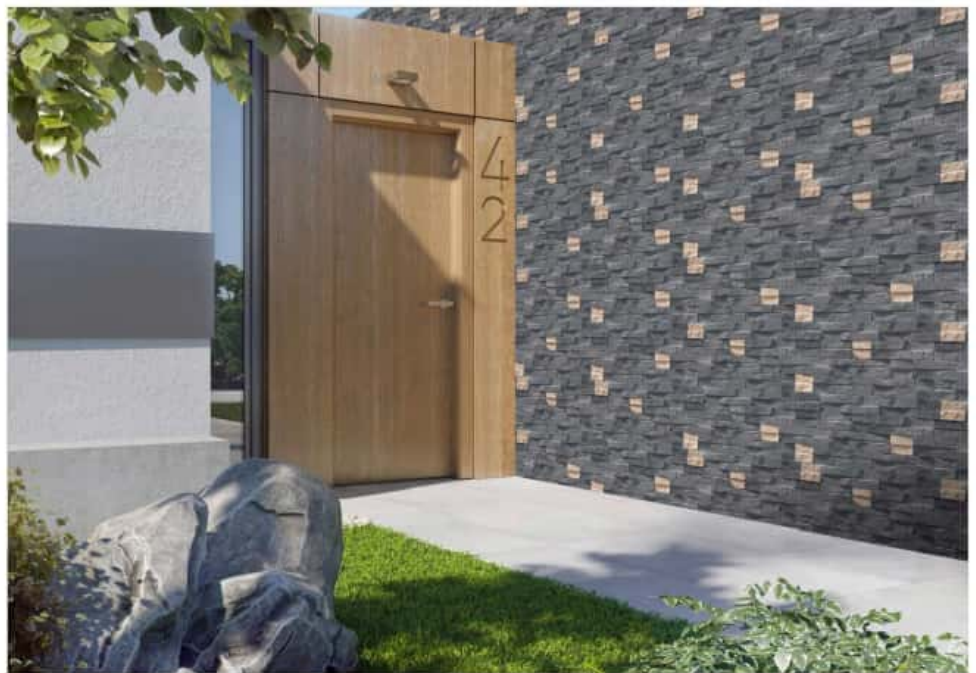

6315

ELEVATION
30x60cm



6316

ELEVATION

30x60cm



6317

ELEVATION

30x60cm



6318

ELEVATION

30x60cm



6319

ELEVATION

30x60cm



6320

ELEVATION

30x60cm



6321

ELEVATION

30x60cm



6322

ELEVATION

30x60cm



6323

ELEVATION

30x60cm



6324

ELEVATION

30x60cm



6325

PACKING DETAILS

S.No.	Dimensions (mm)	No. of Tiles/ Box	Coverage Area
1.	300x600	06	1.08 sq. m.

TECHNICAL SPECIFICATIONS

S.No.	Property	Group B1a-ISO 13006 Annex. G.	Our Value	Test According to
1.	Deviation in length	± 0.6%	± 0.1%	ISO 10545-2
2.	Deviation in thickness	± 5%	± 4%	ISO 10545-2
3.	Straightness of sides	± 0.5%	± 0.1%	ISO 10545-2
4.	Rectangularity	± 0.6%	± 0.1%	ISO 10545-2
5.	Surface flatness	± 0.5%	± 0.15%	ISO 10545-2
6.	Surface quality (%)	A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tile.	98% free from visible defects	ISO 10545-2
7.	Modulus of rupture	> 35 N/mm ²	40 N/mm ²	ISO 10545-4
8.	Breaking strength	> 1300 N	> 2000 N	ISO 10545-4
9.	Water absorption	< 0.5%	< 0.08%	ISO 10545-3
10.	Stain resistance	Stain proof	Stain proof	ISO 10545-14
11.	Chemical resistance	No damage	No damage	ISO 10545-13
12.	Thermal expansion	< 9 x 10 ⁻⁴	< 6 x 10 ⁻⁴	ISO 10545-8
13.	Moisture expansion	Nil	Nil	ISO 10545-10
14.	Thermal shock resistance	No damage	No damage	ISO 10545-9
15.	Resistance to surface abrasion	Manufacturer to state abrasion class	PEI class 3-5	ISO 10545-7